

FA-240 ANTENNA



FEATURES

- ASSEMBLED IN LESS THAN 10 MINUTES
- NO TOOLS REQUIRED
- ONLY 2 CASES <100kgs
- MULTI-BAND FEEDS CHANGED IN MINUTES
- INTELSAT/EUTELSAT COMPLIANT FOR COMMERCIAL BANDS
- WGS, SKYNET, XTAR, INMARSAT AND MIL-STD-810G CERTIFIED
- COMPLETE, INTEGRATED SYSTEMS AVAILABLE

A 2.4m FLYAWAY ANTENNA FOR MULTI-BAND TRANSMISSIONS

The FA-240 is designed specifically for any application requiring a compact, rugged multi-band antenna which is rapidly deployable with no tools.

The FA-240 has a unique multi-band feed arm allowing a change of frequency band in a matter of seconds simply by swapping out a quick release feed cartridge. Termination of transmit waveguide and receive coax is in a safe position at the back of the reflector.

The reflector itself is moulded from carbon fibre honeycomb, ensuring light weight and maximum strength with no deformation, even after being re-assembled hundreds of times.

The axially symmetric design with prime focus feed was chosen because of its overall compact dimensions which make the packed size of the antenna smaller than any other comparable product of similar gain.

It also means that unlike offset fed designs, each antenna petal is identical allowing simple replacement in case of damage.

Intelsat/Eutelsat compliance is guaranteed, including side lobe performance better than 29-25 log θ .

Features fully adjustable, wide spreading legs for high stability on any terrain.

Once deployed, zero backlash, zero back drive gears in all three axis ensure the antenna will remain on target.

The FA-240 can be fully motorised and when combined with the GigaSat STC-100 antenna controller it can automatically acquire and track, even on inclined orbit satellites.

The FA-240 packs into two conveniently sized flight cases and carbon fibre is used not only on the reflector and feed arm but also in the mount and flight cases keeping the weight down to an absolute minimum for transportation.

GigaSat Flyaway antennas available from 1.0m to 3.7m diameter.

WGS, Skynet, Inmarsat and XTAR certified systems are available.

SPECIFICATIONS

General	
Antenna Type	Circular, axially symmetric with centre hub plus ten petals
Diameter	2.4m
Configuration	Prime Focus
Polarisation	Linear orthogonal transmit & receive. (Optional circular left & right)
Cross Polarisation	-35dB within the -1dB co-polar contour (linear)
Port-to-Port Isolation	35dB (Linear)


Transmit		
Transmit Bands	FA-240/60 FA-240/70 FA-240/140 FA-240/180 FA-240/300	5.85 to 7.025GHz 7.9 to 8.4GHz 12.75 to 14.5GHz 17.3 to 18.4GHz 27.5 to 31GHz
3dB Beamwidth	<1.5° at 5.85GHz	
Transmit Power	1.5kW max.	
Off Axis Transmit Gain	<29-25 logθ dBi	
VSWR	1.3:1	
Transmit Gain	FA-240/60 FA-240/70 FA-240/140 FA-240/180 FA-240/300	41.6dBi mid-band 44.1dBi mid-band 48.9dBi mid-band 50.8dBi mid-band 55.0dBi mid-band

Receive		
Receive Bands	FA-240/60 FA-240/70 FA-240/140 FA-240/180 FA-240/300	3.4 to 4.2GHz 7.25 to 7.75GHz 10.7 to 12.75GHz 10.7 to 12.75GHz 17.7 to 22.2GHz
Receive Gain	FA-240/60 FA-240/70 FA-240/140 FA-240/180 FA-240/300	37.4dBi mid-band 43.3dBi mid-band 47.2dBi mid-band 47.2dBi mid-band 51.9dBi mid-band


Power	
Power Requirement	90 to 264V AC Power Supply (option) +24V DC (option)

Environmental	
Temperature	-40 to +70°C - Transportation & Storage -20 to +60°C - Operational
Humidity	1 to 100%
Altitude	4,500m
Wind Rating	Operational 60km/h with gusts to 72km/h Survival 121km/h

Physical		
Elevation Adjustment	0 to 90°	
Azimuth Adjustment	+/-180°	
Polarisation Adjustment	+/-95°	
Packed Size	Box 1	0.95 x 0.95 x 0.6m
	Box 2	0.95 x 0.95 x 0.6m
Weight	Box 1	48kgs
	Box 2	49kgs
	Weights above are for manual, baseline, configuration	

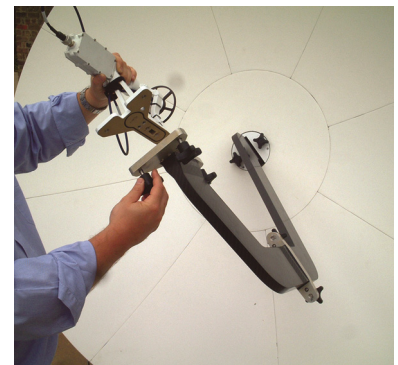

Quick Release Feed

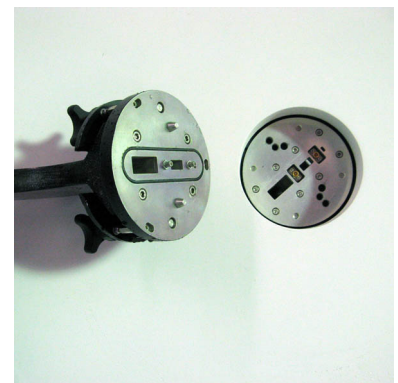

Quad-band Feed arms—C/X, Ku & Ka (C/X, Ku/DBS & Ka available as an option)



making a difference

Ultra Electronics
GIGASAT
 Tring Business Centre
 Icknield Way
 Tring
 Hertfordshire, HP23 4JX
 United Kingdom
 Tel: +44 1442 892000
 Email: enquiries@ultra-gigasat.com
 www.ultra-gigasat.com
 www.ultra-electronics.com

Ultra Electronics reserves the right to vary these specifications without notice.
 © Ultra Electronics Limited 2016.
 Printed in England